



# K-FORM


Crack Control
PAVEMENT SYSTEMS

The award winning K-FORM is a "corrosion free" disposable formwork system that makes it simple to pour more concrete per day.

#### K-FORM is designed for pours of:

- 100mm thick concrete
- 125mm thick concrete
- 150mm thick concrete
- 175mm thick concrete

Easy to use with no need for specialised tools, K-FORM formers have 'click together' simplicity that save you time and money. Just set out your formwork and pour bay after bay. K-Form formers also have a removable top strip making it easy to seal concrete sections.

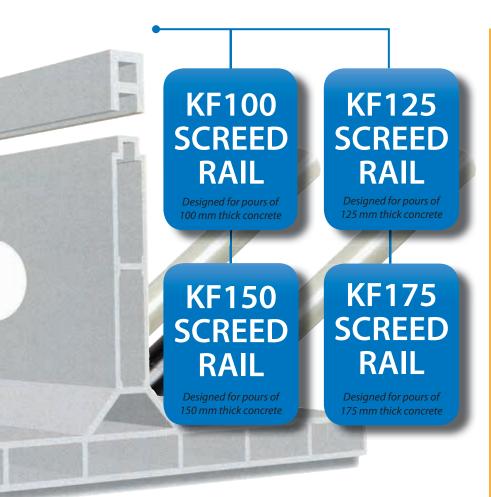

## Features & Benefits

- 1. Saves time and money
- 2. Built-in expansion joint
- 3. Pre-drilled holes for dowel sleeves (300mm centres)
- 4. Removable top capping
- 5. Quality results and finishing
- 6. Durable UPVC
- 7. Lightweight 80% lighter than steel formwork
- 8. Can be installed by one person (reduces labour costs)
- 9. Non-corroding; no metal parts
- 10. Fuel and oil resistant
- 11. Easy to seal concrete sections
- 12. Non-conductive
- 13. No diamond cutting
- 14. Made from recycled materials



### **Product Information**

Product Code	Description	Pack Weight [kg]
KFORM100X1500	Former 100 mm x 1.5 m	3.0
KFORM100X3000	Former 100 mm x 3 m	5.9
KFORM125X1500	Former 12 5mm x 1.5 m	3.4
KFORM125X3000	Former 125 mm x 3 m	6.8
KFORM150X1500	Former 150 mm x 1.5 m	3.9
KFORM150X3000	Former 150 mm x 3 m	7.7
KFORM175X1500	Former 175 mm x 1.5 m	4.3
KFORM175X3000	Former 175 mm x 3 m	8.6
KFORMDAKIT	Dowel Accessory Kit	5.0 / 1 kit

## **SPECIFYING K-FORM**

Supply the following data when ordering:

- 1. Former height
  - 100 mm
  - 125 mm
  - 150 mm or
  - 175 mm
- 2. Former Length 1.5 m or 3 m
- **3. With dowel accessory kit** *(if applicable)*

"CORROSION FREE without the increased co\$t!"

NOTE:

- 1. Each length comes with Former Joint Clips.
- 100 mm and 125 mm Former 1 Clip
- 150 mm and 175 mm Former 2 Clips

## **The System**

#### **Joint formers**


- UV stabilised PVC forms and capping
- Nominal heights of:
- 100 mm
- 125 mm
- 150 mm or
- 175 mm
- Supplied in 1.5 m or 3 m lengths

#### **Dowel accessories kit**


- Pultruded glass-fibre reinforced dowels (14mm diameter x 240 mm long) - QTY 50
- Polypropylene dowel sleeves QTY 50



## Danley™ K-FORM Dowel System Load Capacity Diagram (applies for joint widths up to 15 mm)

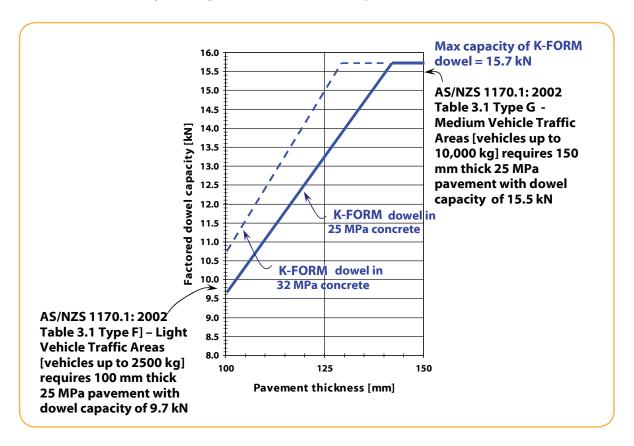

## **Comparison of K-FORM Dowel to 12 mm Diameter Steel Dowel**

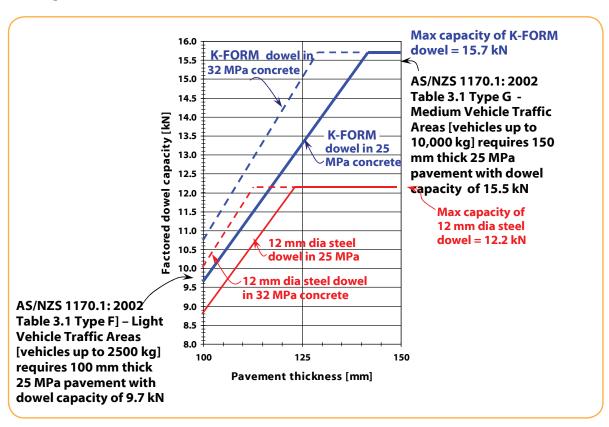



## **K-FORM**
















**1300 DANLEY** (1300 326 539)

www.danley.com.au | sales@danley.com.au

Other related ITW Construction Systems brands





Innovative engineered solutions for the concrete construction industry with specialty in the design of precast and tilt-up. Market leading brands that include Swiftlift™ Concrete Lifting solutions, Reidbar™ Threaded Reinforcing, Nirvana™ Insulated Panel System and a range of Architectural Concrete products.

www.reid.com.au www.reids.co.nz



Expansion Joint systems for civil and architectural specification that includes Floor, Wall, Roof, Facade, and Seismic engineered solutions for Retail Centres, Multi-level Carparks, Hospitals, Bridges and most other suspended slab environments.

www.miska.com.au

## MODFIX

Manufacturing one of the largest ranges of plastic concrete accessories, bar chairs and spacers, as well as components for formwork and precast. Working closely with end users, Modfix™ has continued to assist in the development of new, cost effective solutions for the building and construction industries.

www.modfix.com.au



**Disclaimer:** The information contained in this publication is intended to give a fair description of the products and their capabilities. No responsibility or liability by the manufacturers will be accepted for misuse, misreading or deviation from the recommended guidelines of these products. As new technology is introduced, or industry standards are altered, ITWCS reserves the right to alter the information without notice.